


Multi-Connection Secondary Termination Enclosure

Dual-Entry Access Enclosure

600V, copper bus with NEMA 2-hole spade connectors, 14-gauge mild steel enclosure, Munsell green

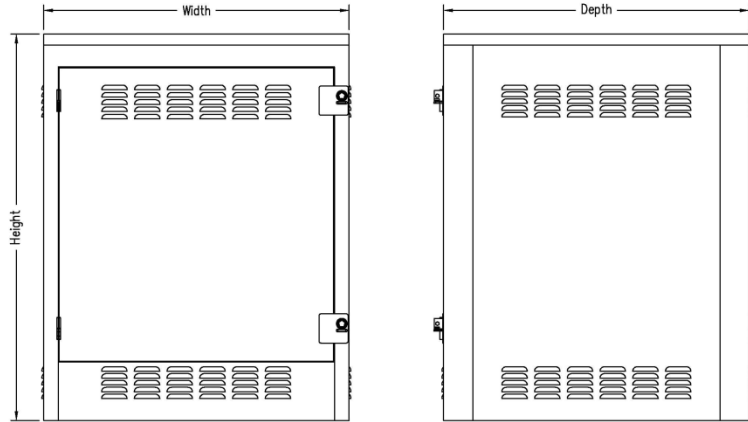

Max Amps ¹	# of Connectors ²	Height (in)	Width (in)	Depth (in)	Catalog No. (mild steel)
1500	14	53	42	42	TWMMD-15C14-FTB-N
3000	14	53	42	42	TWMMD-30C14-FTB-N
4500	14	53	42	42	TWMMD-45C14-FTB-N
6000	14	53	42	42	TWMMD-60C14-FTB-N
1500	20	64	54	54	TWMMD-15C20-FTB-N
3000	20	64	54	54	TWMMD-30C20-FTB-N
4500	20	64	54	54	TWMMD-45C20-FTB-N
6000	20	64	54	54	TWMMD-60C20-FTB-N

NOTE:

¹Rating is based on end-to-end feed.

²Twice the number of cables may be connected if front and back of bus are used.

Please consult the factory or your local sales representative for aluminum bus.

Please consult the factory or your local sales representative for any requirements not listed here.